


Microwave Farm's MFW2 Series are complete line of high performance flexible microwave cable assemblies. Specially, **MFW205 Series** have low density PTFE structure to achieve velocity propagation of 74 % and **excellent phase and amplitude stability performance**. **MFW205 series** have excellent RF performance up to 50 & 67 GHz with 2.4 mm & 1.85 mm connectors, respectively.

■ Features

- Center Conductor : Silver Plated Copper
- Insulator : Low Density PTFE
- Outer Conductor 1 : Silver Plated Copper Foil
- Outer Conductor 2 : Silver Plated Copper
- Jacket : FEP (Blue)

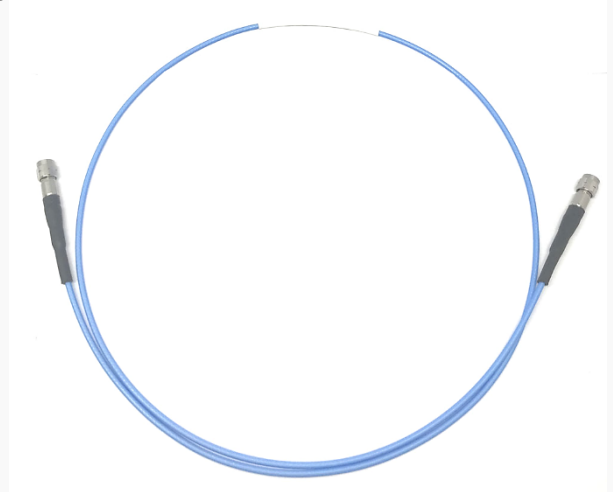

■ Specification


Scope	Specification	MFW205 (50 & 67 GHz)
Physical	Center Conductor (mm)	0.51
	Insulator (mm)	1.52
	Outer Conductor 1 (mm)	1.72
	Outer Conductor 2 (mm)	2.04
	Jacket (mm)	2.40 ± 0.15
Electrical	Characteristic Impedance (Ohm)	50 ± 2 Ohm
	Velocity of Propagation (%)	Typical 74
	Shielding Effectiveness(dB)	-90
	VSWR (Max)	< 1.3
	Amplitude Stability (dB)	<± 0.03 (up to 50 GHz) <± 0.05 (up to 67 GHz)
	Phase Stability (degree)	<±3 (up to 50 GHz) <± 5 (up to 67 GHz)
	Attenuation (at 25 °C)	4.4 dB/m @ 40.0 GHz 5.0 dB/m @ 50.0 GHz 6.0 dB/m @ 67.0 GHz
Mechanical & Environmental	Weight (g/M)	16
	Min. bending radius (mm)	12 (Installation) 24 (Repeated)
	Operating Temperature	-55 ~+165°C

Test Result

MFW205 cable assembly


Part No. : MFW205-2M12M1-1M

- Frequency : 10 MHz to 50 GHz
- Connector : 2.4 mm (Male)
- Cable Length : 1 meter

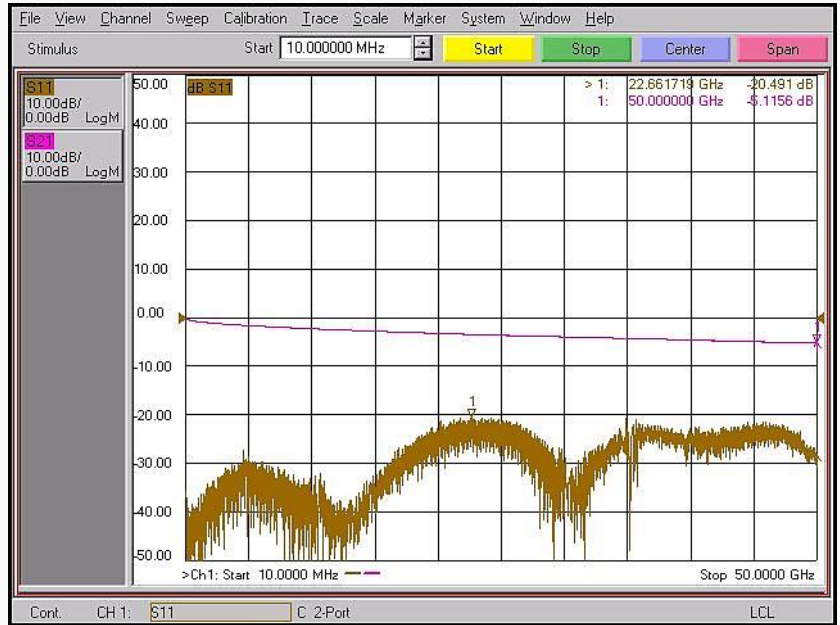

Part No. : MFW205-2F12F1-1M

- Frequency : 10 MHz to 50 GHz
- Connector : 2.4 mm (Female)
- Cable Length : 1 meter

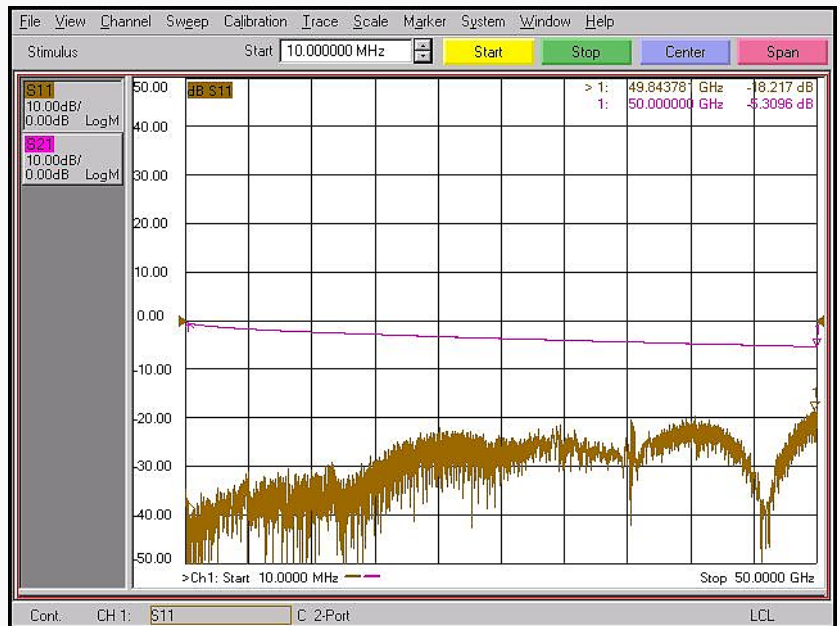


Test Result

MFW205 cable assembly


Part No. : MFW205-VM1VM1-1M

- Frequency : 10 MHz to 67 GHz
- Connector : 1.85 mm (Male)
- Cable Length : 1 meter

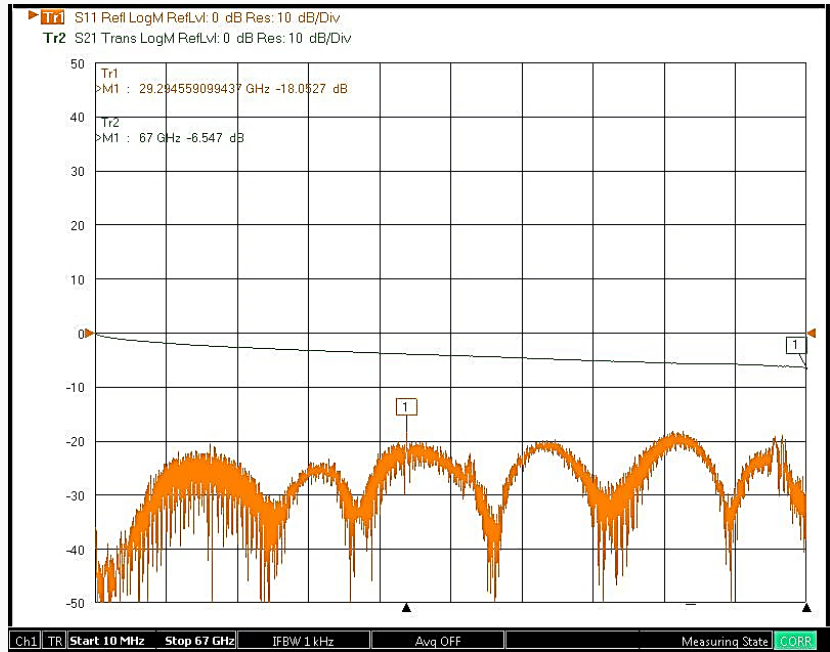


Part No. : MFW205-VF1VF1-1M

- Frequency : 10 MHz to 67 GHz
- Connector : 1.85 mm (Female)
- Cable Length : 1 meter

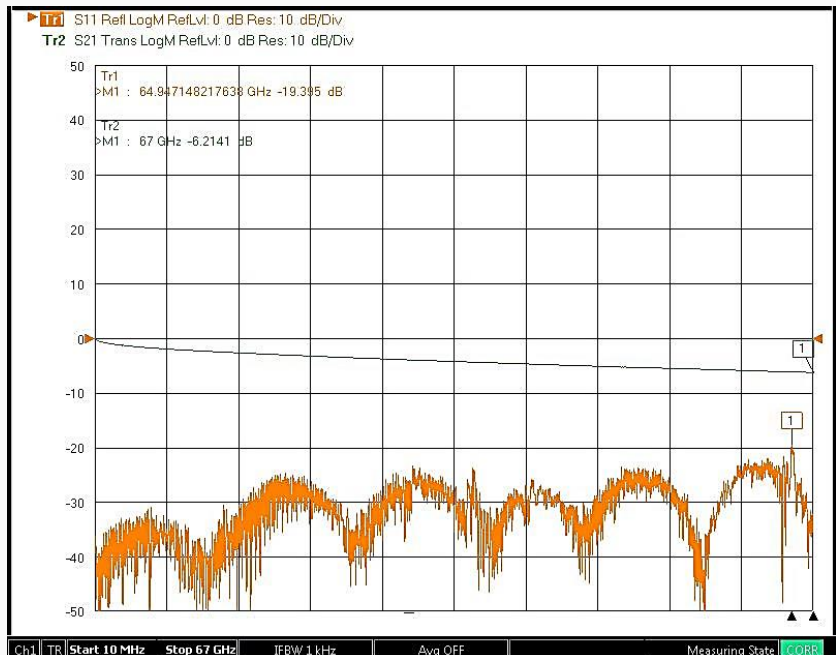

■ Selection Guide

MFW205- VM1VM1 - 1M- 2PS

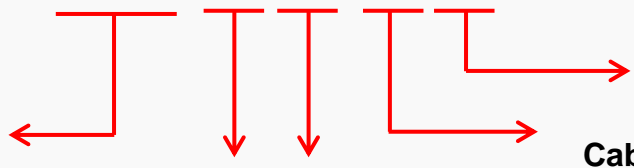

Phase Matching

- 1PS: ± 1 pico-second
- 2PS: ± 2 pico-seconds
- 5PS: ± 5 pico-seconds

Cable Length

Unit : Meter

Cable Type

MFW205

Connector Type

- 2M1 : 2.4 mm Male
- 2F1 : 2.4 mm Female
- VM1 : 1.85 mm Male
- VF1 : 1.85 mm Female

MFW205(50 GHz): 2.4 mm Connectors



MFW205(67 GHz): 1.85 mm Connectors

