
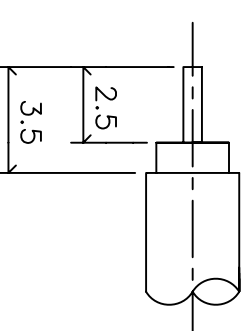
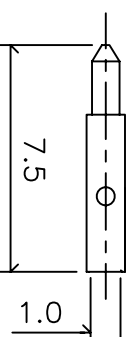


SMA404-141 T124055000TU

品名: SMA ストレート プラグ 0.141" セミリジッド セミフレキ 用

SMA404-141

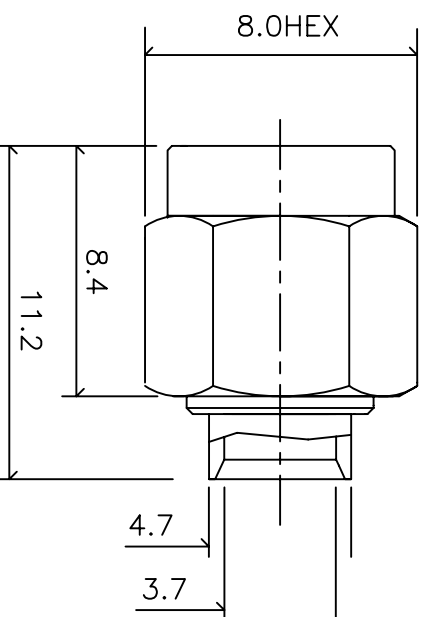

**Electrical**

Impedance: 50 Ω  
 Frequency: DC-12.4GHz  
 V.S.W.R: 1.19Max at 2.0GHz  
 Insulation Resistance: 5000MΩ Minimum  
 Contact Resistance:  
 Center Coantact:: 4m Ω  
 Outer Contact: 3m Ω  
 Insulator Withstanding Voltage: 750VRMS

**Mechanical**

- ① Body: Brass Gold Finish 5 μ Inch
  - ② Center contact: Brass, Gold Finish 30 μ Inch
  - ③ Insulator: Teflon
  - ④ Fellule: Brass Gold finish 5 μ Inch
- Brass Material: Cd < 75ppm, Pb < 40,000ppm  
 RoHs Regulation: Comply  
 Dulability: 500cycles

△	-	-		
△	-	-		
△	-	-		
△	-	-		
△	-	-		

未記入公差	公差	尺度	単位	製品名
長さ公差	± 0.08		mm	TAKITEK タキテック株式会社
直径公差	± 0.03		mm	
				SMA straight plug for 141"
				Semi Flex
				部品名
				T124 055 000