SMA405−174 T124072000TU

品名：SMA ストレート プラグ RG174 RG316（φ2.6mm）ケーブル用

SMA405−174

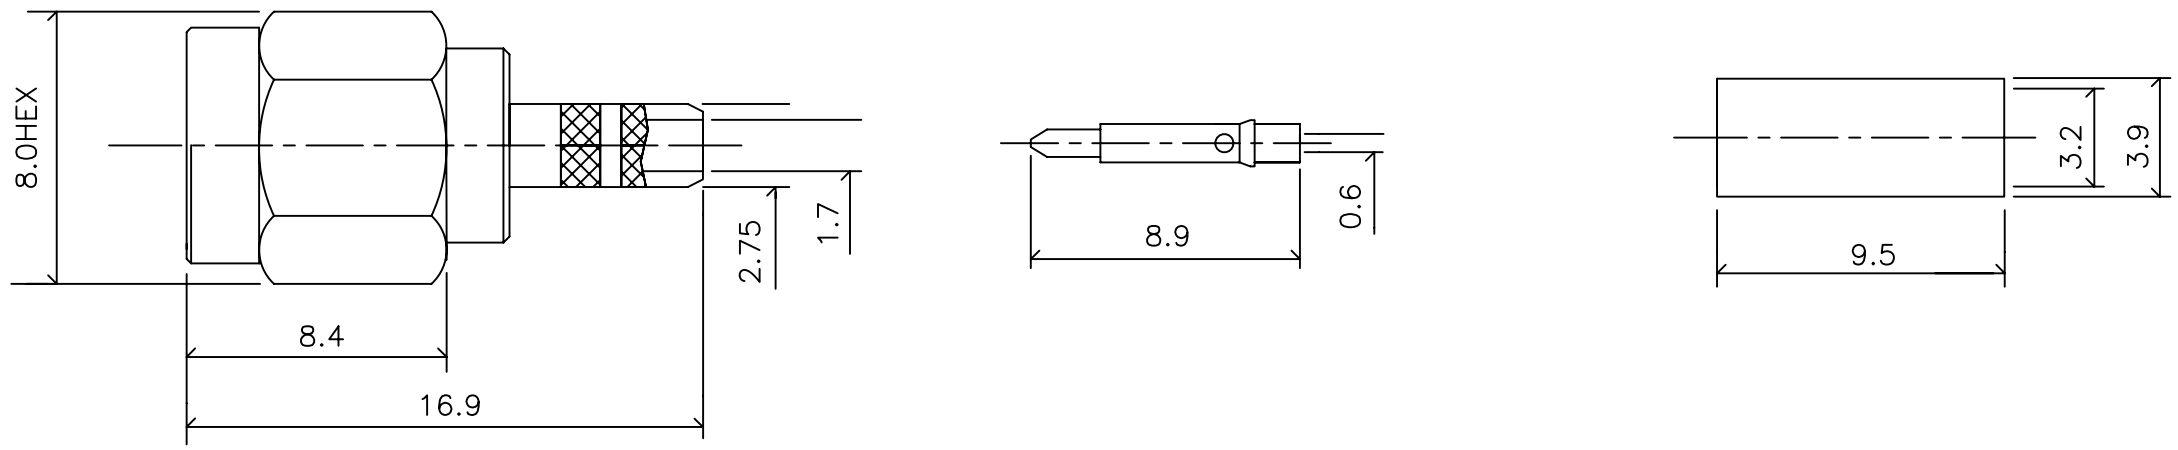

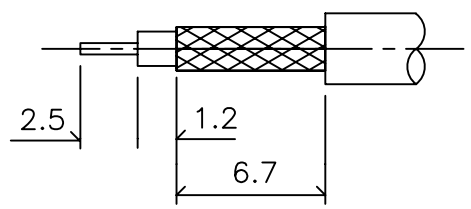

Electrical

Impedance: 50Ω
Frequency: DC−12.4GHz
V.S.W.R: 1.19Max at 2.0GHz
Inslation Resiatance: 5000MΩ Minimum
Contact Resistance:
　　Center Coantact:: 4mΩ
　　Outer Contact: 3mΩ
Insulator Withstanding Voltage: 750VRMS

Mechanical

① Body: Brass Gold Finish 5μ Inch
② Center contact: Brass, Gold Finish 30μ Inch
③ Insulater: Teflon
④ Fellule: Brass Gold finish 5μ Inch
Brass Material: Cd< 75ppm, Pb< 40,000ppm
RoHs Regulation: Comply
Dulability: 500cycles

△	- -			
△	- -			
△	- -			
△	- -			
△	- -			

未記入公差 長度公差：± 0.08 直径公差：± 0.03	尺度	単位 mm	TAKITEK タキテック株式会社
			製品名 SMA straight plug for RG174 (φ2.5mm)
	製図 / 設計 / 照査		部品名 T124 072 000