SMA845−178 T124362000TU

品名：SMAジャック バルクヘッド RG178 ケーブル （φ2.0mm）用

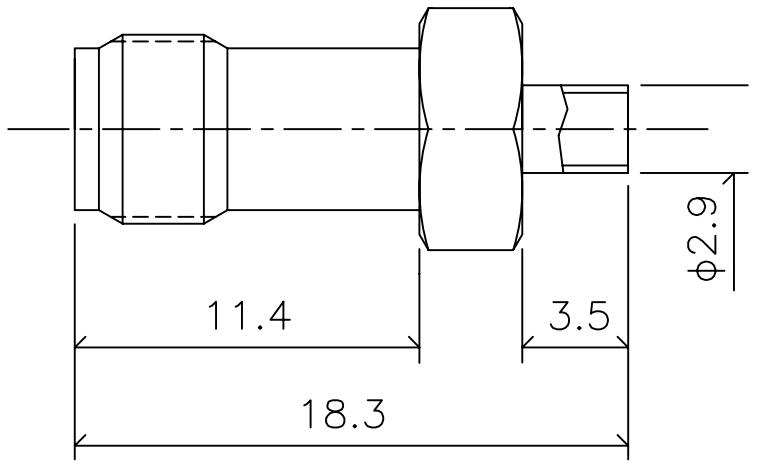

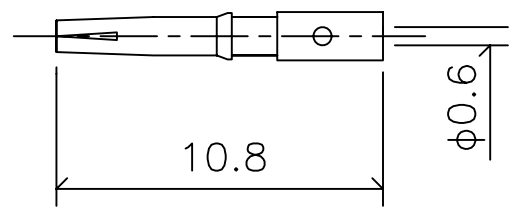



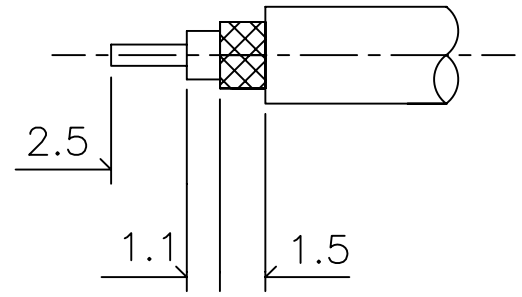

Electrical

Impedance: 50Ω
Frequency: DC−12.4GHz
V.S.W.R: 1.19Max at 2.0GHz
Inslation Resiatance: 5000MΩ Minimum
Contact Resistance:
　　Center Coantact:: 4mΩ
　　Outer Contact: 3mΩ
Insulator Withstanding Voltage: 750VRMS

Mechanical

① Body: Brass Gold Finish 5μ Inch
② Center contact: BeCu, Gold Finish 30μ Inch
③ Insulater: Teflon
Brass Material: Cd< 75ppm, Pb< 40,000ppm
RoHs Regulation: Comply
Dulability: 500cycles

△	- -			
△	- -			
△	- -			
△	- -			
△	- -			

未記入公差	尺度	単位	TAKITEK タキテック株式会社
長度公差：± 0.08 直径公差：± 0.03		mm	製品名 SMA Jack for RG178 (φ2.0mm) Flex Cable
			部品名 T 124 362 000
	製図	設計	照査