SMA601−18.8/6.0 T124413186TU

品名：SMA フランジマウント 4穴 全長：18.8mm,誘電体：6.0mm, 端子：φ1.27mm

SMA601−18.8/6.0

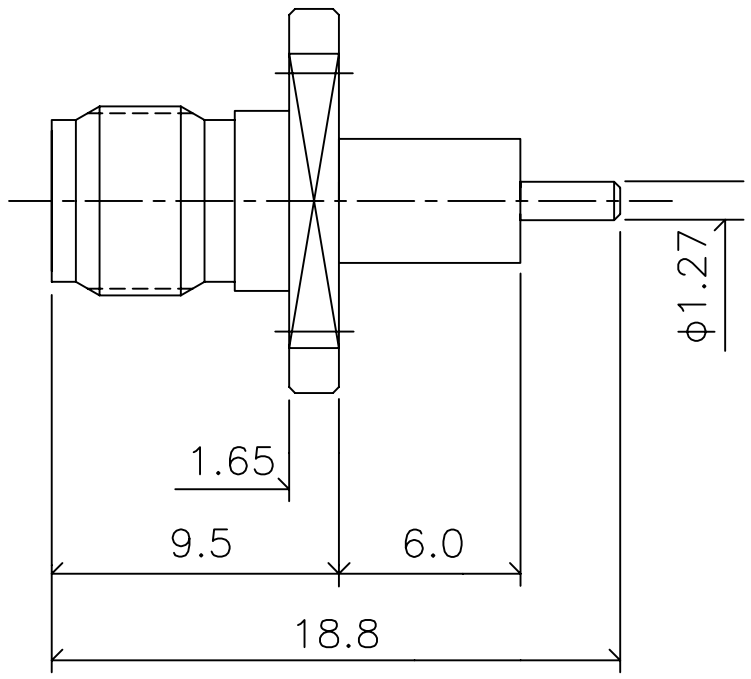

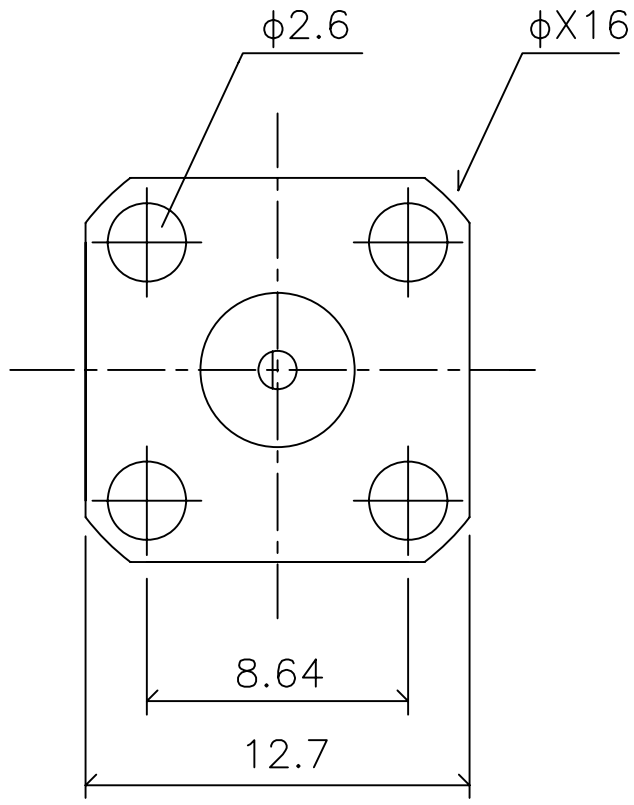

Electrical

Impedance: 50Ω
Frequency: DC−12.4GHz
V.S.W.R: 1.19Max at 2.0GHz
Inslation Resiatance: 5000MΩ Minimum
Contact Resistance:
Center Coantact:: 4mΩ
Outer Contact: 3mΩ
Insulator Withstanding Voltage: 750VRMS

Mechanical

① Body: Brass Gold Finish 5μ Inch
② Center contact: Be Cupper, Gold Finish 30μ Inch
③ Insulater: Teflon
④ Fellule: Brass Gold finish 5μ Inch
Brass Material: Cd< 75ppm, Pb< 40,000ppm
RoHs Regulation: Comply
Dulability: 500cycles

△	- -			
△	- -			
△	- -			
△	- -			
△	- -			

未記入公差 長度公差：± 0.08 直径公差：± 0.03	尺度	単位 mm
製図	設計	照査

TAKITEK
タキテック株式会社

製品名
SMA 4Hole Frange Mount Jack

部品名
T124 413 186