SMA611−16.4 T124464160TU

品名：SMA フランジマウント 2穴 全長：16.4mm, 誘電体長：5.0mm、端子：φ1.27mm

SMA611−16.4

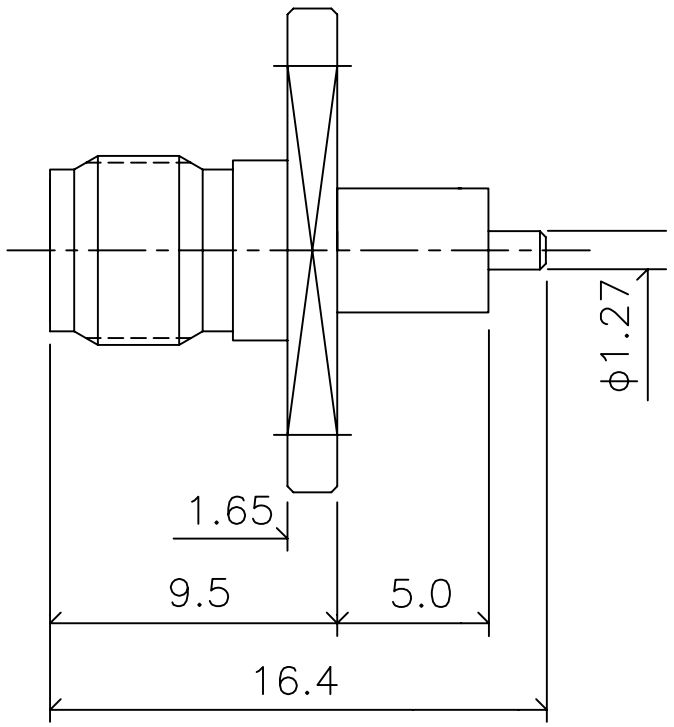

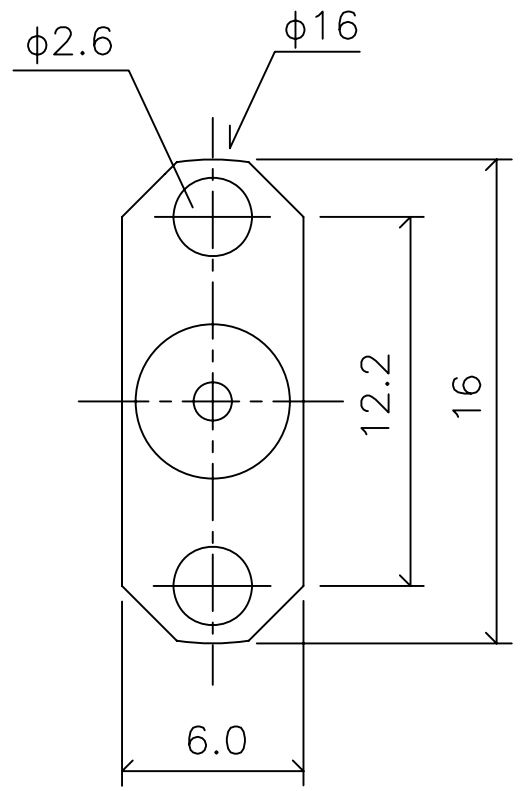

Electrical

Impedance: 50Ω
Frequency: DC−12.4GHz
V.S.W.R: 1.19Max at 2.0GHz
Inslation Resiatance: 5000MΩ Minimum
Contact Resistance:
　　Center Coantact:: 4mΩ
　　Outer Contact: 3mΩ
Insulator Withstanding Voltage: 750VRMS

Mechanical

① Body: Brass Gold Finish 5μ Inch
② Center contact: Be Cupper, Gold Finish 30μ Inch
③ Insulater: Teflon
④ Fellule: Brass Gold finish 5μ Inch
Brass Material: Cd< 75ppm, Pb< 40,000ppm
RoHs Regulation: Comply
Dulability: 500cycles

△	- -			
△	- -			
△	- -			
△	- -			
△	- -			

未記入公差 長度公差：± 0.08 直径公差：± 0.03	尺度	単位 mm	TAKITEK タキテック株式会社
			製品名 SMA 2Hole Frange Mount Jack
製図	設計	照査	部品名 T124 464 160