SMA611−27.4　T124464270TU

品名：SMA　フランジマウント　2穴　全長：27.4mm, 誘電体長：15mm、端子：φ1.27mm

SMA611−27.4

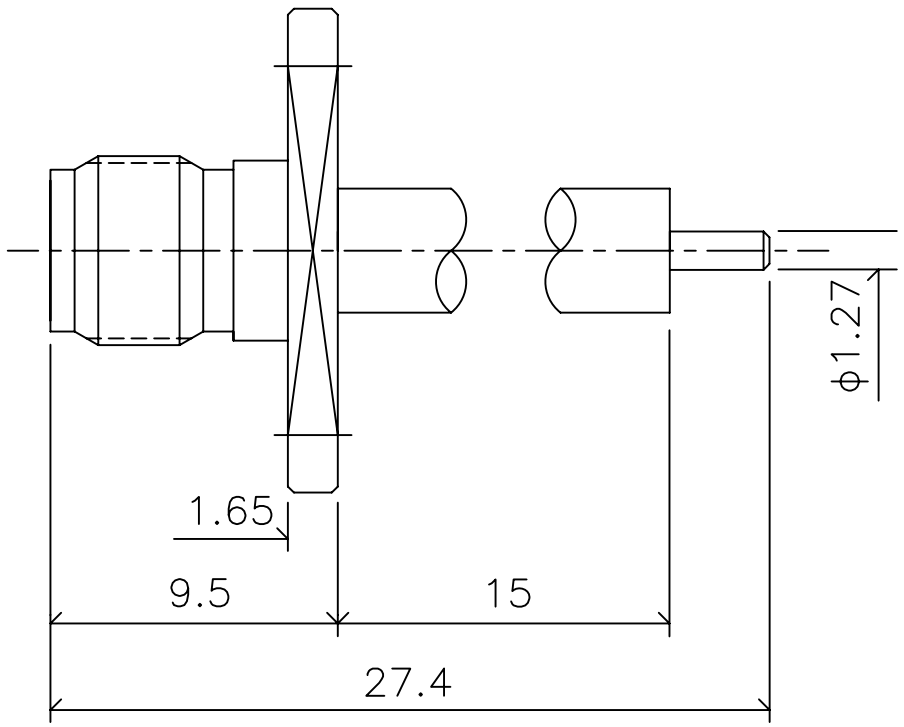


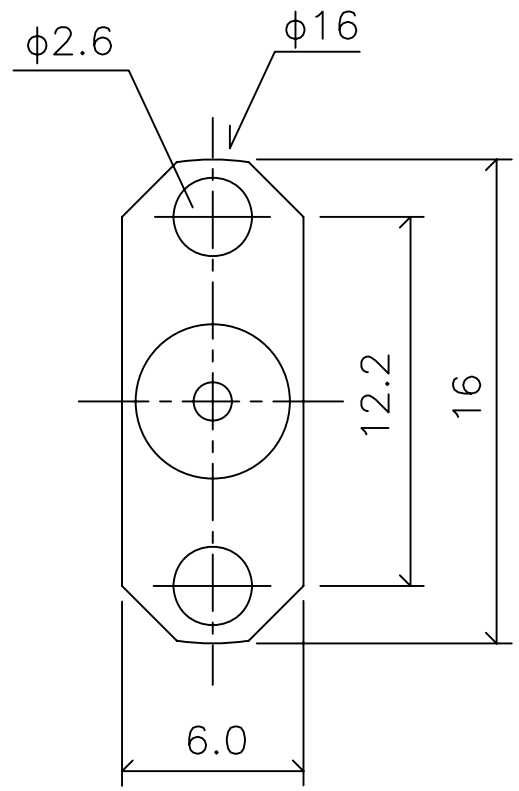


**Electrical**

Impedance: 50Ω
Frequency: DC−12.4GHz
V.S.W.R: 1.19Max at 2.0GHz
Inslation Resiatance: 5000MΩ Minimum
Contact Resistance:
　　Center Coantact:: 4mΩ
　　Outer Contact: 3mΩ
Insulator Withstanding Voltage: 750VRMS

**Mechanical**

① Body: Brass Gold Finish 5μ Inch
② Center contact: Be Cupper, Gold Finish 30μ Inch
③ Insulater: Teflon
④ Fellule: Brass Gold finish 5μ Inch
Brass Material: Cd< 75ppm, Pb< 40,000ppm
RoHs Regulation: Comply
Dulability: 500cycles

| | | | | |
|---|---|---|---|---|
| △ | - - | | | |
| △ | - - | | | |
| △ | - - | | | |
| △ | - - | | | |
| △ | - - | | | |

| | | | |
|---|---|---|---|
| 未記入公差<br>長度公差：± 0.08<br>直径公差：± 0.03 | 尺度 | 単位<br>mm | TAKITEK<br>タキテック株式会社 |
| | | | 製品名<br>SMA 2Hole Frange Mount Jack |
| 製図 | 設計 | 照査 | 部品名<br>T124 464 270 |