



500-4200MHz, 8W, 28V RF Power LDMOS FETs

Description

The ITCH42008E2 is a 8-watt, internally matched LDMOS FET, designed for cellular base station and ISM applications with frequencies from 500MHz to 4200 MHz



•Typical Performance (On Innogrator fixture with device soldered):

$V_{DD} = 28$ Volts, $I_{DQ} = 100$ mA, Pulse Width =10us, Duty Cycle =12%.

3600-3800M demo:

Frequency (MHz)	Gain (dB)	P _{3dB} (dBm)	η_D (%)
3600	13.9	41.7	47.6
3700	15.3	41.2	46.8
3800	14.2	40.9	44.9

4000~4200M demo:

Frequency (MHz)	Gain (dB)	P _{3dB} (dBm)	η_D (%)
4000	15.6	40.6	39.8
4100	14.8	40.8	41
4200	15.3	40.2	41.7

Highlight: The fixture is used same board different BOM.

Features

- High Efficiency and Linear Gain Operations
- Integrated ESD Protection
- Internally Matched for Ease of Use
- Excellent thermal stability, low HCI drift
- Large Positive and Negative Gate/Source Voltage Range for Improved Class C Operation
- Pb-free, RoHS-compliant

Table 1. Maximum Ratings

Rating	Symbol	Value	Unit
Drain--Source Voltage	V_{DSS}	+65	Vdc
Gate--Source Voltage	V_{GS}	-10 to +10	Vdc
Operating Voltage	V_{DD}	+32	Vdc
Storage Temperature Range	T_{stg}	-65 to +150	°C
Case Operating Temperature	T_c	+150	°C
Operating Junction Temperature	T_j	+225	°C

Table 2. Thermal Characteristics

Characteristic	Symbol	Value	Unit
Thermal Resistance, Junction to Case $T_c=85^\circ\text{C}$, $T_j=200^\circ\text{C}$,DC test	$R_{\theta JC}$	3.6	°C/W

Table 3. ESD Protection Characteristics

Test Methodology	Class
Human Body Model (per JESD22--A114)	Class 2

Table 4. Electrical Characteristics (TA = 25°C unless otherwise noted)



DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS}=0V; I_{DS}=100\mu A$	V_{DSS}	65			V
Zero Gate Voltage Drain Leakage Current	$V_{DS} = 28 V, V_{GS} = 0 V$	I_{DSS}			1	μA
Gate--Source Leakage Current	$V_{GS} = 9 V, V_{DS} = 0 V$	I_{GSS}			1	μA
Gate Threshold Voltage	$V_{DS} = 28V, I_D = 300 \mu A$	$V_{GS(th)}$		1.75		V
Gate Quiescent Voltage	$V_{DS} = 28 V, I_{DS} = 150 mA$, Measured in Functional Test	$V_{GS(Q)}$		2.7		V

Pulse CW Signal performance (In Innegration Test Fixture, 50 ohm system): $V_{DD} = 28 Vdc, I_{DQ} = 100 mA, f = 4200 MHz$, Pulse CW, Pulse Width = 10us, Duty Cycle = 12%.

Characteristic	Symbol	Min	Typ	Max	Unit
Power Gain	G_p		15.3		dB
Drain Efficiency@P3dB	η_D		41.7		%
3dB Compression Point	P_{-3dB}		40.2		dBm
Input Return Loss	IRL		-7		dB

Load Mismatch (In Innegration Test Fixture, 50 ohm system): $V_{DD} = 28 Vdc, I_{DQ} = 100 mA, f = 4200 MHz$

VSWR 10:1 at 10W Pulsed CW Output Power	No Device Degradation
---	-----------------------

TYPICAL CHARACTERISTICS


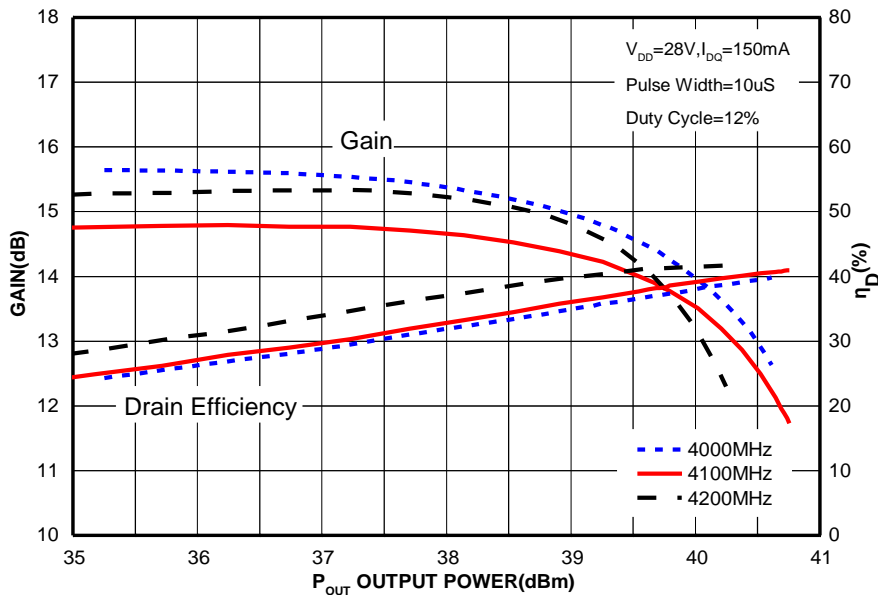


Figure 1. Power gain and drain efficiency as function of Pulse output power



Package Outline

Earless Flanged ceramic package; 2 leads

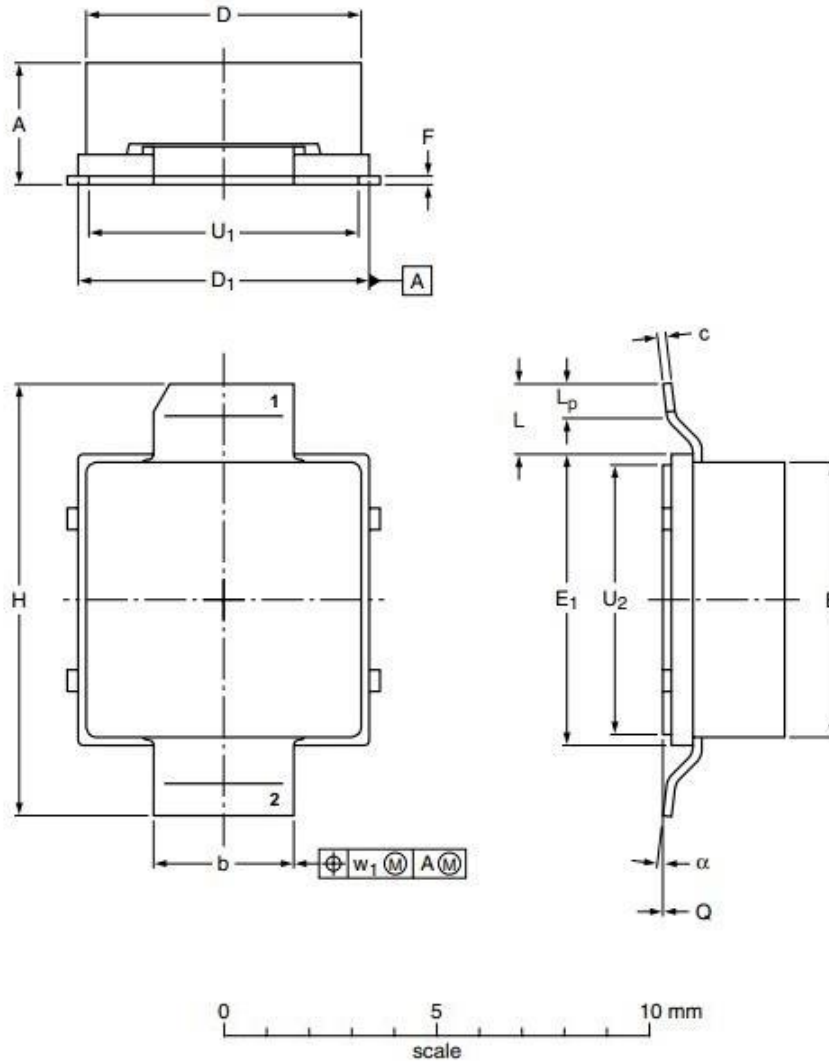

UNIT	A	b	c	D	D ₁	E	E ₁	F	H	L	L _p	Q	U ₁	U ₂	w ₁	α
mm	3.63	3.38	0.23	6.55	6.93	6.55	6.93	0.23	10.29	1.65	1.02	+0.05	6.43	6.43	0.51	7°
	3.05	3.23	0.18	6.40	6.78	6.40	6.78	0.18	10.03							
inches	0.143	0.133	0.009	0.258	0.273	0.258	0.273	0.009	0.405	0.065	0.040	+0.002	0.253	0.253	0.02	7°
	0.120	0.127	0.007	0.252	0.267	0.252	0.267	0.007	0.395							

OUTLINE VERSION	REFERENCE			EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA		
PKG-E-A					10/22/2013



Revision history

Table 5. Document revision history

Date	Revision	Datasheet Status
2017/02/23	Rev 1.0	Preliminary Datasheet
2017/7/12	Rev 2.0	Frequency range updated

Disclaimers

Specifications are subject to change without notice. Innogrations believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Innogrations for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Innogrations. Innogrations makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Innogrations in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Innogrations products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Innogrations product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility. For any concerns or questions related to terms or conditions, pls check with Innogrations and authorized distributors
Copyright © by Innogrations (Suzhou) Co.,Ltd.