



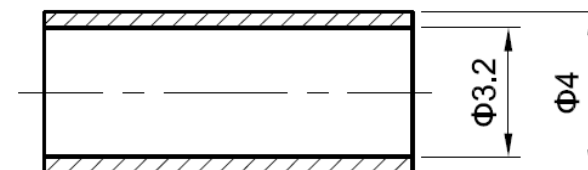

REV	Revision Note	DATE	DRAWN	APPROVED

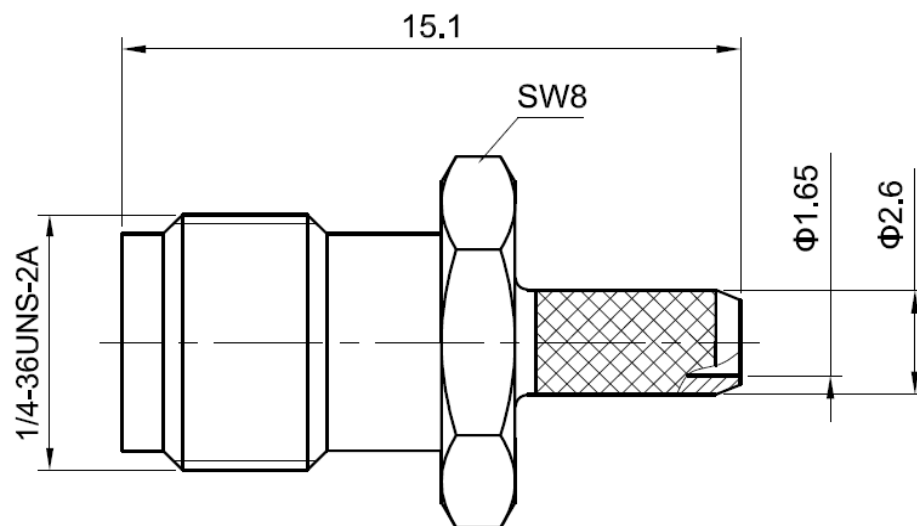

NOTES:

1. Temperature range:-40~+125°C;
2. Characteristic impedance:50 Ω;
3. Frequency range:0~18GHz;
4. Dielectric withstanding voltage:750V rms;
5. Insulation resistance:≥1000M Ω;
6. VSWR:≤1.15(0-3GHz);
7. Contact resistance:Center contact:≤3.0mΩ,
Outer contact:≤2.0mΩ;
8. Durability:500 cycles;

4	Ferrule	Brass	Nickel	1
3	Body	Brass	Gold	1
2	Insulators	Teflon	/	1
1	Center Contact	Beryllium Bronze	Gold	1
NO.	Description	Material	Finish	Q'TY
Materials and surface treatment				

Unless otherwise
specified tolerance

>120~400 ±1.0

>30~120 ±0.6

>6~30 ±0.4

>0.5~6 ±0.2

Ang ±1°

UNITS: mm

VIEW PROJECTION:



TAKITEK

TITLE:

SMA(J) ST For 1.5D-2V(Gold Body)

SCALE:

1:1

Designed

LuXiaolei

DWG NO.

Checked

DongZhiJun

Approved

Baizhongbo

Date

07/18/2015

PART NO.

T125780700XI

REV:

A/0