






T124124074TU

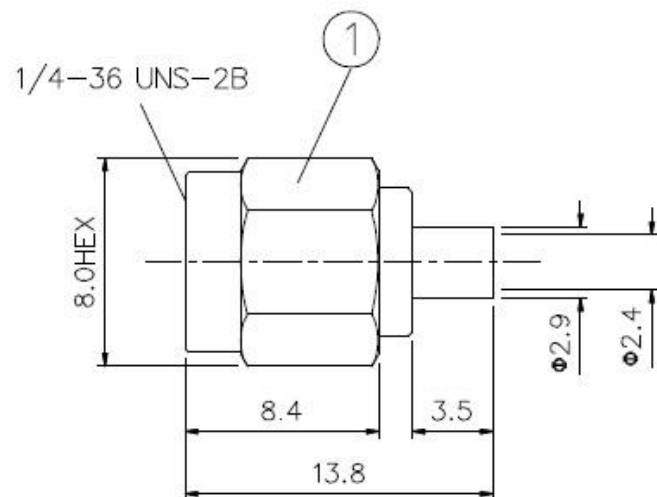

ELECTRICAL PERFORMANCE :

IMPEDANCE : 50 OHMS

FREQUENCY : DC-12.4GHz

WORKING VOLTAGE : 170Vrms MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 500Vrms MAX.

INSULATOR RESISTANCE : 5000 MEGOHMS MIN.

RECOMMENDED CABLE STRIPPING DIM'S

NO.	DESCRIPTION	MATERIALS	FINISHED
1	BODY	BRASS	Gold
	SHELL	BRASS	Gold
	INSULATOR	TEFLON	
	C-RING	Be. Copper	
	GASKET	SILICON	
2	CONTACT	BRASS	Gold 15u"
3	INSULATOR	TEFLON	
4	FERRULE	BRASS	Copper-Tin-Zinc

RoHS COMPLIANCE Unit : mm Scale : NTS

TOLERANCE :

X=±0.2 X.X=±0.1 X.XX=±0.05

TITLE :

SMA Male S/T Crimp Type
for 1.13 Cable

TAKITEK

PART NO.

SMA405-1.13